
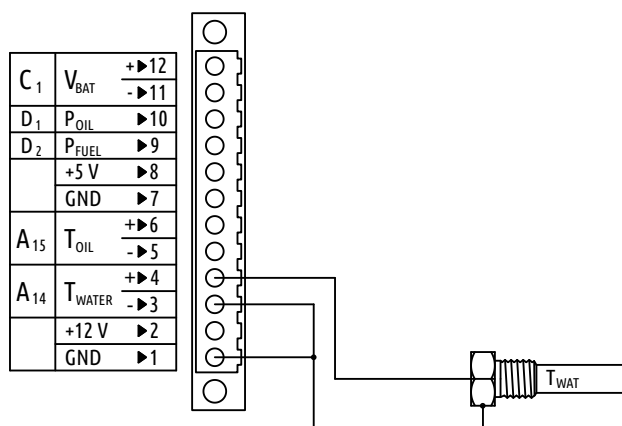


SPECIFICATION DRAWING


DAQU CONFIGURATION

OPTION	SELECTION/SETTING
CHANNEL:	ANY A, but A13
FUNCTION:	CHT 1, CH 2, ...
SENSOR:	WESTACH 399
FILTER:	2000ms/2s
FREQUENCY:	1Hz - 2Hz
REPORT TIME:	0.5 - 1.0 s

OPTION	SELECTION/SETTING
CHANNEL:	ANY A, but A13
FUNCTION:	COOLANT TEMP.
SENSOR:	WESTACH 399
FILTER:	2000ms/2s
FREQUENCY:	1Hz - 2Hz
REPORT TIME:	0.5 - 1.0 s

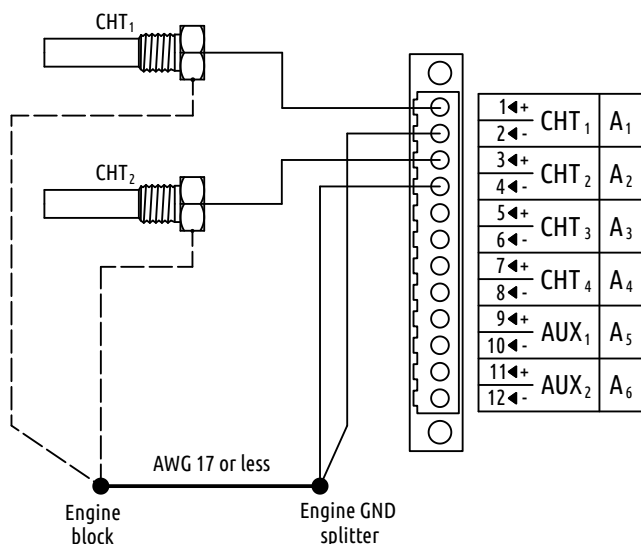

PART PHOTO/DRAWING

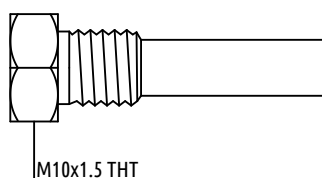

SPECIFICATION

WEIGHT:	25g
TEMPERATURE RANGE:	100-240 °F/ 38-116 °C
TYPE:	Resistive, NTC Thermistor

NOTES

- "LO" may be shown when temperature is below 25°C.
- Typically used as coolant/CHT sensor on Rotax engines.

PART NAME:		You can find this product under part numbers:	
S-399S10-M10X1.5		Westach 399S10-1.5L	
FILE NAME: ~/Shared/Sensors/S-399S10-M10x1.5.dxf			
TITLE:		Westach - Coolant/Water and CHT Temperature Sender M10X1.5	
DATE:		10.3.2022	
SCALE:		N/A	
SHEET:		1 of 1	
DRAW BY:		ŽP	
CHECK BY:		GT	
REV:		A	

KANARDIA d.o.o.	
Lopata 24a	
3000 Celje	
Slovenia	